

MODEL# PLGMD

GM PASSLOCK 2 DATA BYPASS KIT

GM VATS DATA BYPASS KIT

Interfaces and DISARMS ALL GM PASSLOCK 2


& 1996 + GM VATS SYSTEMS via OBDII connector.

*PLGMD DOES NOT DISARM FACTORY CONTENT THEFT

ALARM OF PONTIAC SUNFIRE AND CHEVROLET CAVALIER



"The Key to OEM Integration!"

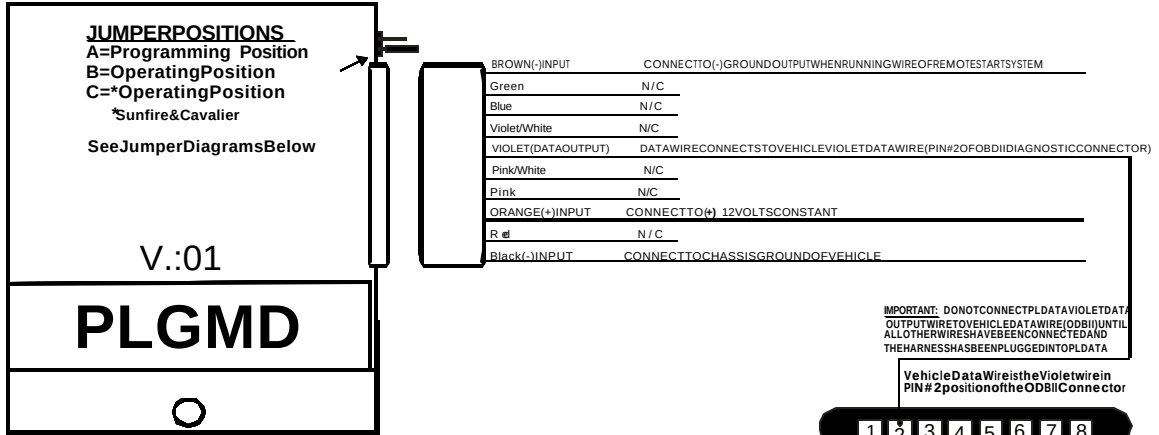

TOP PROGRAM PLGMD-PASSLOCK 2 INTERFACE KIT:

Once PLGMD harness is correctly connected

A) Put programming jumper into **Programming Position FIG:A**

B) Plug PLGMD module into harness (Jumper must be in programming position)

C) Crank engine with the IGNITION key. * (Note it is not necessary to start engine)

D) LED on PLGMD will blink 4 times after engine cranks to indicate PL DATA is programmed.

E) Turn ignition key to "OFF" position, then remove Jumper from **Programming Position**.

F) Place Jumper into **Operating Position** either **FIG:B** for All PASSLOCK 2 or VATS

Or **FIG:C** For PASSLOCK 2 equipped Pontiac Sunfire and Chevrolet Cavaliers

Tech Notes:

-PLGMD IS NOT Compatible with GM Passlock 1

-PLGMD IS Only Compatible with VATS equipped with OBDII connector 1996 +

-OBD I EQUIPPED VEHICLES DO NOT HAVE A DATA WIRE TO CONNECT TO.

-Sunfire and Cavaliers equipped with content theft cannot be disarmed during remote starting due to internal BCM function. PLGMD can be used but it is recommended to add a aftermarket keyless entry function and discontinue use of factory remote transmitters to avoid triggering content theft alarm.

DISCLAIMER: Under no circumstances shall the manufacturer or the distributors of the PLGMD parts be held liable for consequential damages sustained in connection with the PLGMD. The manufacturer and its distributors will not, nor will they authorize any representative or any other individual to assume obligation or liability in relation to the PLGMD other than its replacement.

TECHNICAL SUPPORT:

727-572-9255 ext.230

www.periphalelectronics.com

