

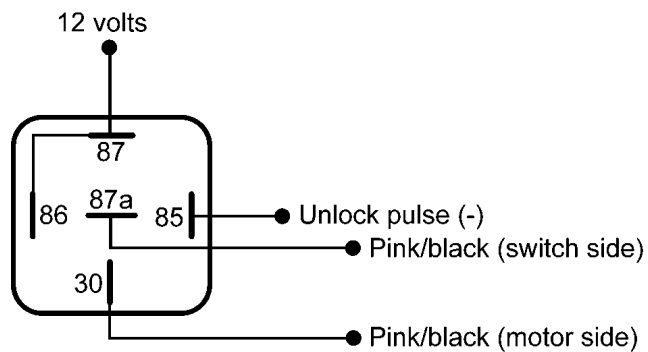
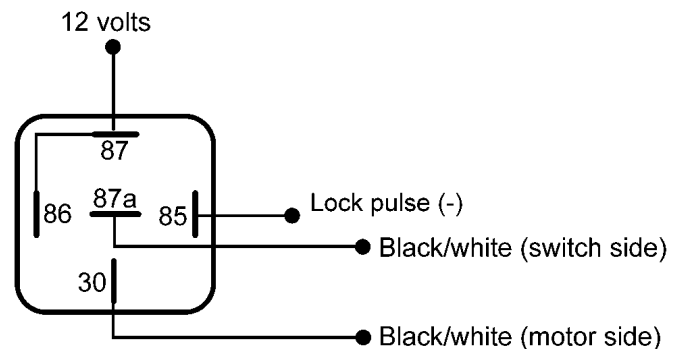


DOORLOCKS ON THE JEEP GRAND CHEROKEE 1996 & UP

DRIVER'S DOOR

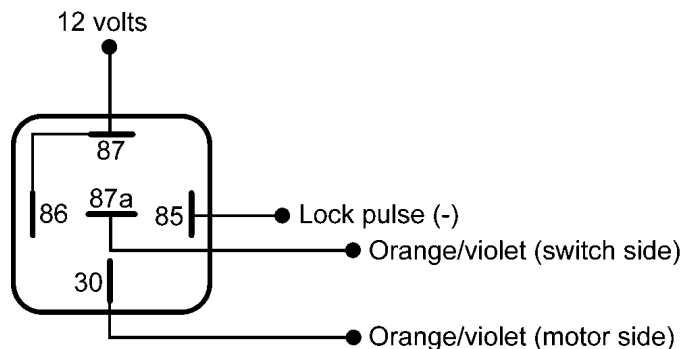

PASSENGER'S DOOR

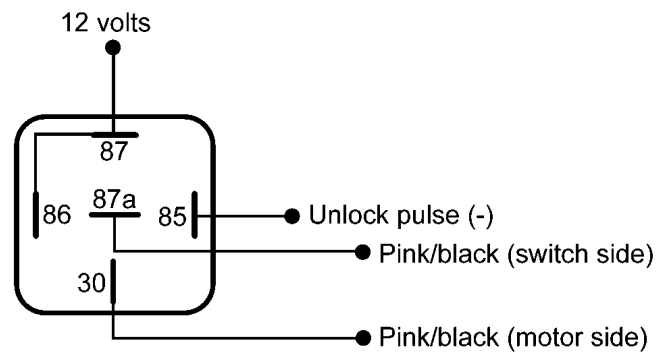

The Jeep Grand Cherokee 1996 & up uses a multi-plex doorlock system and can not be triggered from the keyless entry module. You must install 2 relays directly in the driver's door at the lock motor to operate that door and do the same in the passenger door, which controls all the other doors including the rear hatch. The diagram illustrates a basic reverse polarity system for both doors.

PLEASE NOTE: Operating the doorlocks in this way does not allow you to arm the factory security, if it is essential that you do, an alternate method must be used to interface the doorlocks, see the appropriate diagram in the graphic browser for the vehicle you are working on.

NOTE: The information on this sheet is provided on an "as is" basis with no representation or warranty of accuracy whatsoever. It is the sole responsibility of the installer to check and verify any circuit before connecting to it. Only a computer safe logic probe or digital multimeter should be used. Wiremagic.com Corp. assumes absolutely no liability or responsibility whatsoever pertaining to the accuracy or currency of the information supplied. The installation in every case is the sole responsibility of the installer performing the work and Wiremagic.com Corp. assumes no liability or responsibility whatsoever resulting from any type of installation, whether performed properly, improperly or any other way. The information supplied is a guide only.